




5D $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V/125V

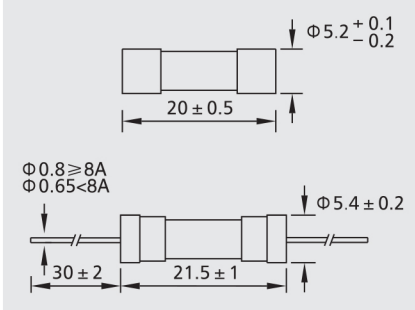


测试标准:
Testing Standard:
UL248-1 UL248-14

额定分断能力:
Interrupting Rating:
10000 Amperes at 125V AC
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AC(1.25A~10A)

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

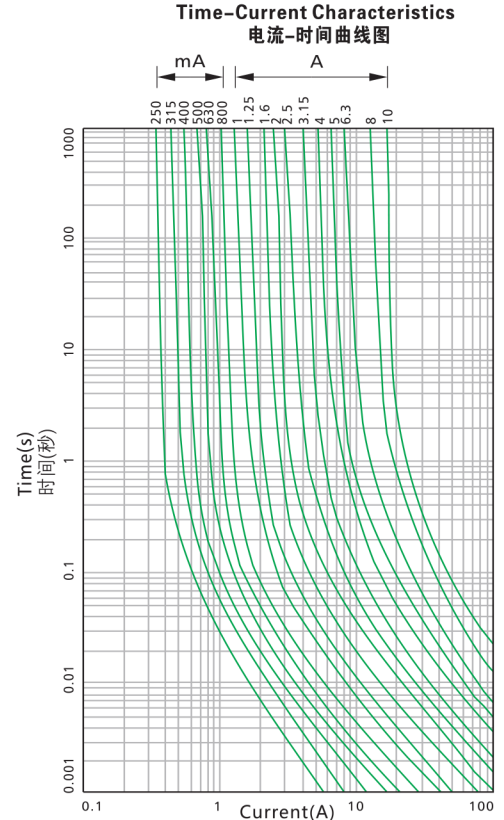

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	5 s Max(小于5秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals		
5D0125A/B	125mA	250V/125V	0.003	●	●	
5D0160A/B	160mA	250V/125V	0.005	●	●	
5D0200A/B	200mA	250V/125V	0.010	●	●	
5D0250A/B	250mA	250V/125V	0.020	●	●	
5D0315A/B	315mA	250V/125V	0.045	●	●	
5D0400A/B	400mA	250V/125V	0.07	●	●	
5D0500A/B	500mA	250V/125V	0.10	●	●	
5D0630A/B	630mA	250V/125V	0.20	●	●	
5D0750A/B	750mA	250V/125V	0.35	●	●	
5D0800A/B	800mA	250V/125V	0.45	●	●	
5D1100A/B	1A	250V/125V	0.9	●	●	
5D1125A/B	1.25A	250V/125V	1.3	●	●	
5D1150A/B	1.5A	250V/125V	1.6	●	●	
5D1160A/B	1.6A	250V/125V	2.5	●	●	
5D1200A/B	2A	250V/125V	5.8	●	●	
5D1250A/B	2.5A	250V/125V	7.6	●	●	
5D1300A/B	3A	250V/125V	8.1	●	●	
5D1315A/B	3.15A	250V/125V	11	●	●	
5D1350A/B	3.5A	250V/125V	19	●	●	
5D1400A/B	4A	250V/125V	28	●		●
5D1500A/B	5A	250V/125V	40	●		●
5D1600A/B	6A	250V/125V	50	●		●
5D1630A/B	6.3A	250V/125V	64	●		●
5D1800A/B	8A	250V/125V	133	●		●
5D2100A/B	10A	250V/125V	242	●		●

● 表示已获认证
● 表示认证中