

SURGiNG

紹 鑫 實 業




Midget Fuse

新能源熔断器

BS88-240 Series



英制BS88快速半导体熔断器 BS88 High speed semi-conductor Fuse



测试标准:
Testing Standard:
UL248-1 UL248-13

额定分断能力:
Interrupting Rating:
10000 Amperes at 150V DC
50000 Amperes at 240V AC

工作温度:
Operating Temperature:
-55°C~+125°C

材料/Material:


Terminals: Tin plated copper
Tube: Ceramic Tube
Element: Silver alloy
Filler: Silica Sand

电气特性: Electrical Characteristics


% Ampere Rating	Opening Time
100%	4Hours Min.
200%	300 Seconds Max.

产品尺寸: Dimension

Type	A±2	B±1	C±2	D±1.5	F±0.8	G±0.8	P±1	H±0.5	J±0.8
LCT	56	17.5	26	41.5	6.5	12	19	2	9.5
LET	67	29	31	49	8.2	20	31.5	3	11.5
LMT	93.5	37	31	59	10.5	25.4	41	3	14.5

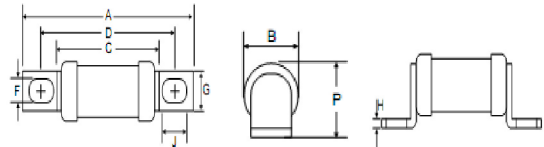

**Time-Current Characteristics
电流-时间曲线图**

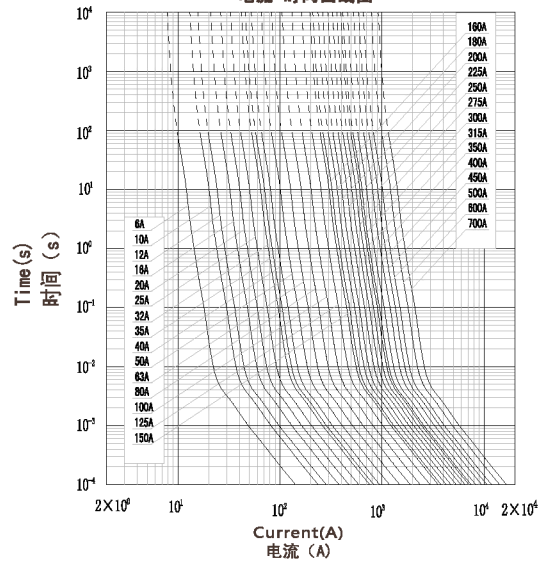

目录编号/Catalog No.:

目录号 Catalog No.	额定电流 Rated current	额定电压 Rated Voltage	Energy Integrals $\int I^2 dt (A^2 \cdot s)$			功耗(w) Power Loss	认证 Approvals	● 表示已获认证 ○ 表示认证中
			Pre-Acting	at 150V	at 300V			
LCT-6A	6A	300VAC/200VDC	2	6	9	1		○
LCT-10A	10A	300VAC/200VDC	3.8	12	22	2.5		○
LCT-12A	12A	300VAC/200VDC	7	22	32	2.5		○
LCT-16A	16A	300VAC/200VDC	20	50	100	3		○
LCT-20A	20A	300VAC/200VDC	25	80	160	4		○
LCT-25A	25A	300VAC/200VDC	18	120	250	4		○
LCT-32A	32A	300VAC/200VDC	32	200	450	5		○
LCT-35A	35A	300VAC/200VDC	50	320	600	5		○
LCT-50A	50A	300VAC/200VDC	100	500	1400	7		○
LCT-63A	63A	300VAC/200VDC	180	1100	2200	9		○
LCT-80A	80A	300VAC/200VDC	300	1900	3800	10		○
LCT-100A	100A	300VAC/200VDC	600	3800	7500	10		○
LCT-125A	125A	300VAC/200VDC	850	4000	8000	16		○
LCT-150A	150A	300VAC/200VDC	950	5000	8500	20		○
LCT-160A	160A	300VAC/200VDC	1100	7000	16000	20		○
LET-180A	180A	300VAC/200VDC	1600	12000	29000	21		○
LET-200A	200A	300VAC/200VDC	1500	10000	20000	28		○
LET-225A	225A	300VAC/200VDC	2800	15000	30000	26		○
LET-250A	250A	300VAC/200VDC	3200	20000	40000	28		○
LET-275A	275A	300VAC/200VDC	5000	23000	45000	32		○
LET-300A	300A	300VAC/200VDC	6000	35000	75000	35		○
LMT-315A	315A	300VAC/200VDC	6000	35000	75000	35		○
LMT-350A	350A	300VAC/200VDC	8000	50000	100000	38		○
LMT-400A	400A	300VAC/200VDC	14000	70000	160000	40		○
LMT-450A	450A	300VAC/200VDC	18000	100000	220000	42		○
LMT-500A	500A	300VAC/200VDC	24000	140000	280000	44		○
LMT-600A	600A	300VAC/200VDC	38000	210000	430000	48		○
LMT-700A	700A	300VAC/200VDC	46000	300000	600000	62		○